



# 软管接头

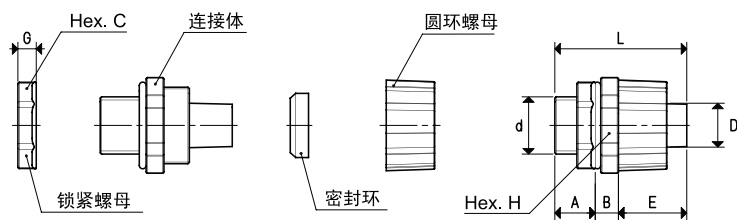

RTPR接头

型号	d ∅	A	B	C	D ∅	E	G	H	L	材料	颜色	重量 g
<b>RTPR 3/8"</b>	G3/8"	14,5	8,5	26	12,0	23,5	6	28	46,5	聚丙烯	灰色	12
<b>RTPR 1/2"</b>	G1/2"	14,5	9,0	28	15,5	26,5	7	33	50,0	聚丙烯	灰色	18
<b>RTPR 3/4"</b>	G3/4"	14,0	10,5	35	20,8	26,5	9	38	51,0	聚丙烯	灰色	26
<b>RTPR 1"</b>	G1"	16,0	9,0	41	26,5	32,5	10	44	57,5	聚丙烯	灰色	36

工作温度: -10° / +60 °C

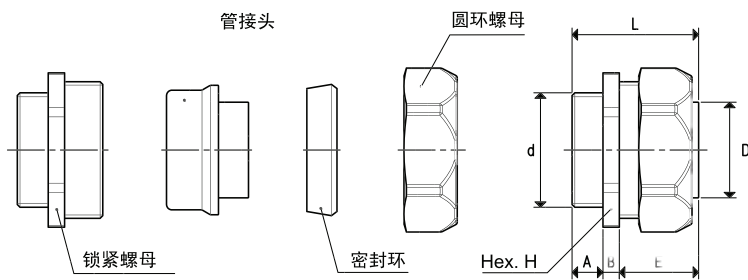

RTPR接头

型号	d ∅	A	B	D ∅	E	H	L	材料	重量 g
<b>RTPR 1" 1/4</b>	G1" 1/4	11	6	34,5	28,5	52	45,5	镀镍黄铜	340
<b>RTPR 1" 1/2</b>	G1" 1/2	14	7	39,5	34,0	60	55,0	镀镍黄铜	530
<b>RTPR 2"</b>	G2"	14	7	50,0	33,0	74	54,0	镀镍黄铜	596

工作温度: -20° / +60 °C