



VACUUM PUMPS VTLP 25/FG, 30/FG and 35/FG WITH DISPOSABLE LUBRICATION

These vacuum pumps have a suction flow rate of 25, 30 and 35 m³/h.

The vacuum with disposable oil lubrication is adjusted via two oilers located in correspondence of the support bearings.

The rotor is cantilevered-fitted on the motor shaft and supported by independent bearings housed in the two pump flanges.

The pump and the electric motor are, therefore, two independent units and fixed onto a special support and connected to each other via an elastic transmission joint.

All this allows using standard electric motors, in the shapes and sizes indicated in the table.

The pump is surface cooled. Heat is dispersed from the outer surface, suitably finned, by means of a radial fan placed between motor and pump.








An oil recovery tank is installed on the pump exhaust. This tank contains a separator filter that prevents oil mists and reduces noise.

A safety valve is also installed on the tank for the automatic drainage of the exhaust oil when not regularly drained.

The lubrication oil is contained in a special transparent container, fixed to the pump via its support, and controlled by a magnetic level switch.

In pumps with disposable lubrication, the oil is sucked in the pump through an adjustable drip oilers and drained together with the sucked air in the recovery tank, without being put in circulation again. These pumps are necessary when the air to be sucked contains water condensation, solvent vapours or anything else that could affect oil properties.

We strongly recommend installing a check valve and a filter on the suction inlet. Also this range of pumps can be supplied with single-phase electric motors.

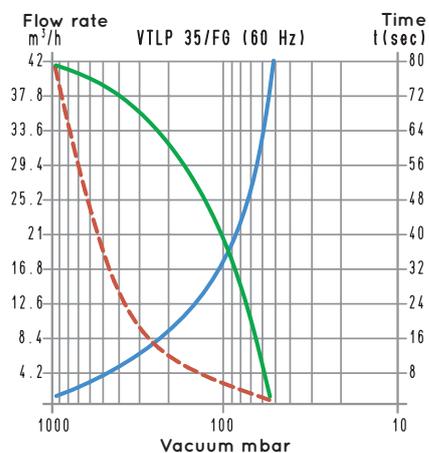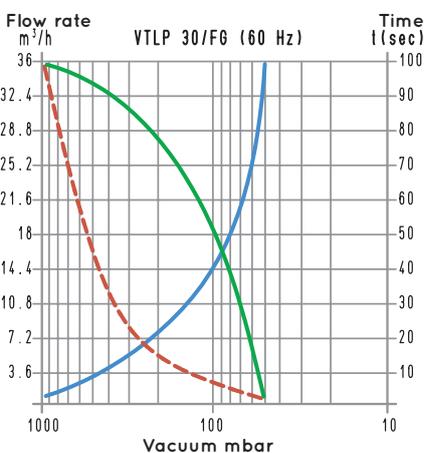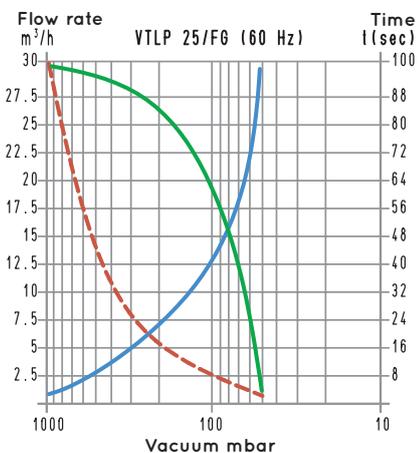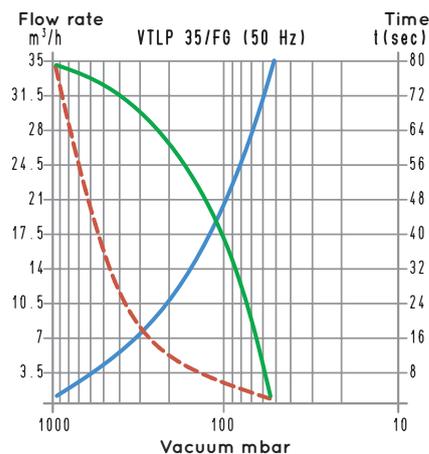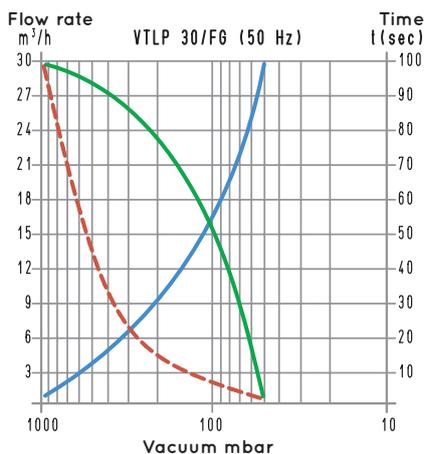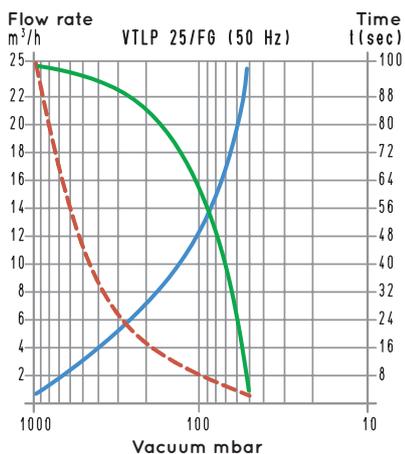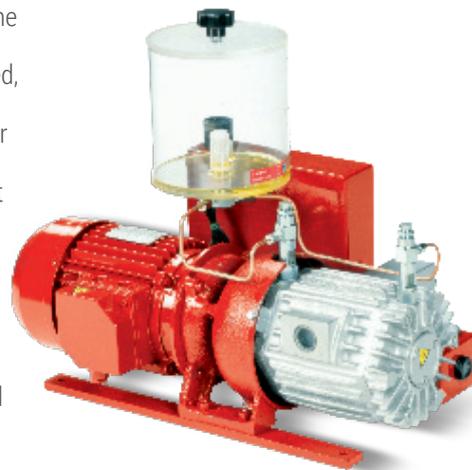


To calculate the emptying time of a volume of V_1 , use the following formula: $t_1 = \frac{t \times V_1}{100}$

- Curve relative to the flow rate (referring to the suction pressure)
- - - Curve relative to the flow rate (referring to a 1013 mbar pressure)
- Curve regarding the emptying time of a 100-litre volume

- V_1 : Volume to be emptied (l)
- t_1 : time to be calculated (sec)
- t : time obtained in the table (sec)

VACUUM PUMPS VTLP 25/FG, 30/FG and 35/FG WITH DISPOSABLE LUBRICATION

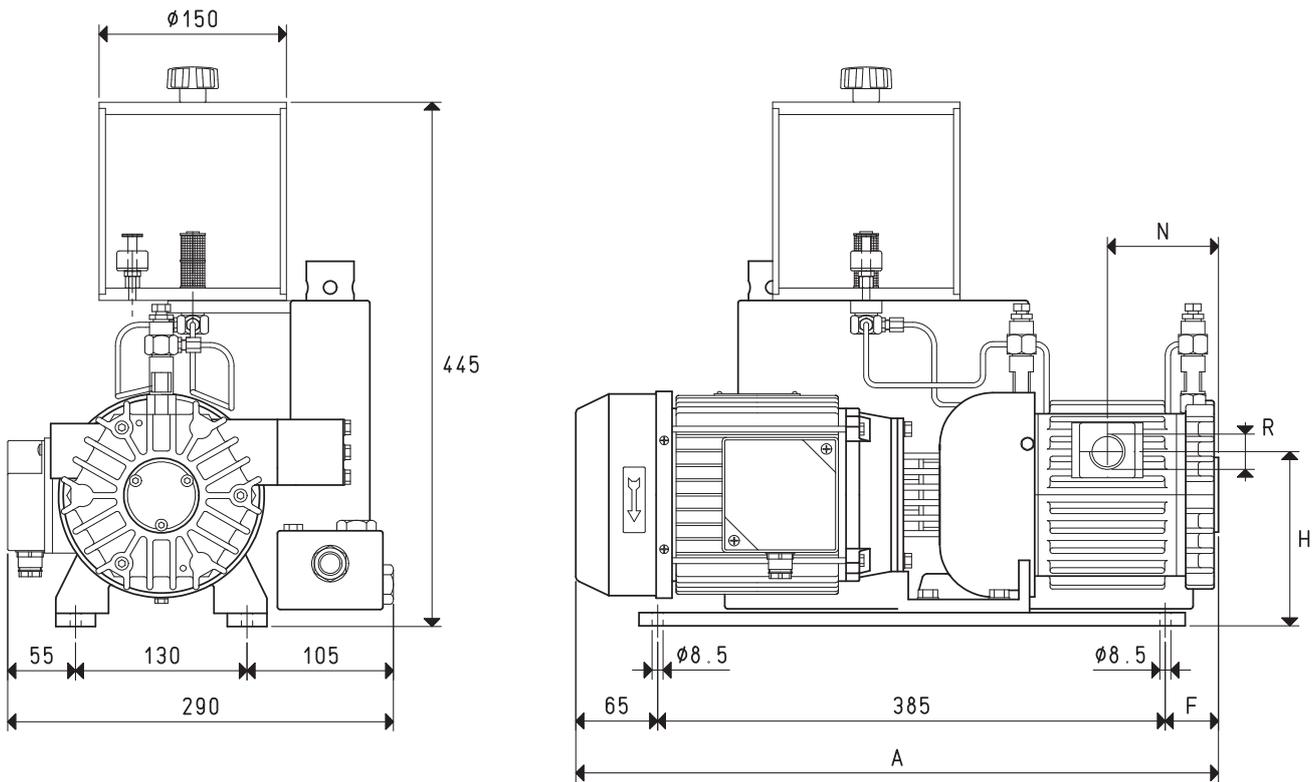

3D drawings are available on vuototecnica.net

Item	VTLP 25/FG		VTLP 30/FG		VTLP 35/FG			
Frequency	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz		
Flow rate	m ³ /h		25.0	30.0	30.0	36.0	35.0	42.0
Final pressure	mbar abs.		50		50			
Motor performance	3~	Volt	230/400±10%	265/460±10%	230/400±10%	265/460±10%	230/400±10%	265/460±10%
	1~	Volt	230±10%		230±10%		230±10%	
Motor power	3~	Kw	0.75	0.90	0.75	0.90	1.10	1.35
	1~	Kw	0.75		0.75		1.10	
Motor protection	IP		55		55		55	
Rotation speed	g/min ⁻¹		1410	1640	1410	1640	1435	1745
Motor shape			B14		B14		B14	
Motor size			80		80		80	
Noise level	dB(A)		64	66	65	67	65	67
Max weight	3~	Kg	32.0		36.0		38.0	
	1~	Kg	32.5		36.5		38.5	
A			470		490		510	
F			20		40		60	
H			133		133		133	
N			73		83		93	
R	Ø gas		G3/4"		G3/4"		G3/4"	
Accessories and Parts	VTLP 25/FG		VTLP 30/FG		VTLP 35/FG			
Oil charge	L	1.8	1.8		1.8			
Lubricating oil	type	ISO 100	ISO 100		ISO 100			
Vane	item	00 VTL 25FG 10 (N°6)	00 VTL 30FG 10 (N°6)		00 VTL 35FG 10 (N°6)			
Sealing kit	item	00 KIT VTL 25FG	00 KIT VTL 30FG		00 KIT VTL 35FG			
Check valve	item	10 04 15	10 04 15		10 04 15			
Suction filter	item	FB 28 - FC 25 - FPL 4 - FCL 4 - FIL 4	FB 28 - FC 25 - FPL 4 - FCL 4 - FIL 4		FB 28 - FC 25 - FPL 4 - FCL 4 - FIL 4			
Oil level switch	item	00 LP VTL 99	00 LP VTL 99		00 LP VTL 99			
Oil filter	item	00 LP VTL 40	00 LP VTL 40		00 LP VTL 40			
Adjustable drip oiler	item	00 VTL 00 11	00 VTL 00 11		00 VTL 00 11			

Note: Add the letter M to the item for a pump supplied with a single-phase electric motor (Example: VTLP 25/FG M).

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)

inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$

cfm = m³/h x 0.588; inch Hg = mbar x 0.0295; psi = bar x 14.6