






## 真空泵和泵组阀座

这类阀座用于分配从泵和泵组产生的真空到多个执行机构。由喷漆钢管制造而成，在钢管上安装了关断阀以及真空接口，可以用来安装真空调度显示及控制装置。本页所述的是标准阀座，根据要求，可以提供不同的尺寸和构造。


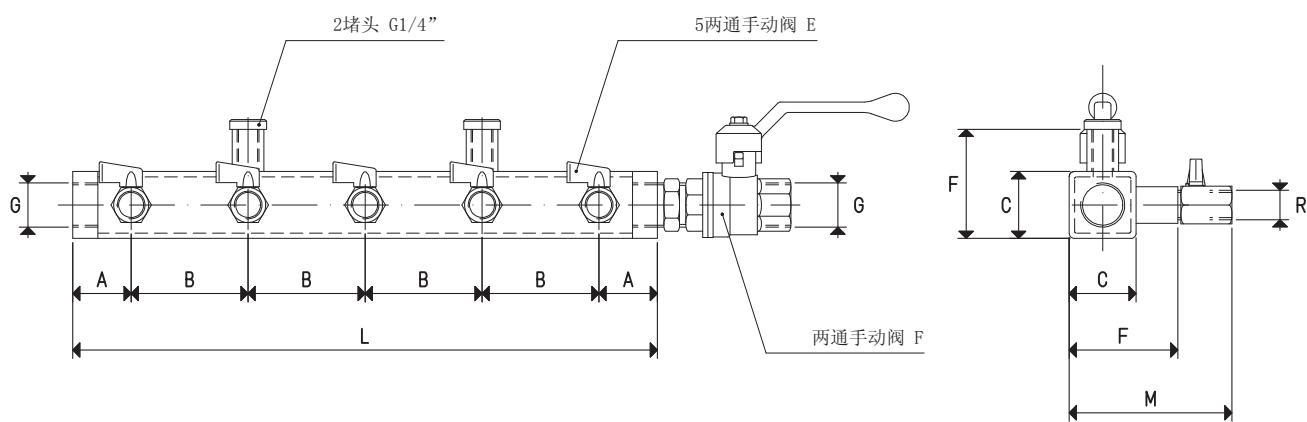


型号	A	B	C	F	G Ø	L	M	R Ø	手动阀 E 型号	手动阀 F 型号	重量 Kg
<b>COLL 01 03</b>	35	70	40	65	G1/2"	350	100	G1/4"	13 01 11	13 03 10	1.75
<b>COLL 01 04</b>	35	70	40	65	G3/4"	350	100	G3/8"	13 02 11	13 04 10	1.90
<b>COLL 01 05</b>	35	70	40	65	G1"	350	100	G3/8"	13 02 11	13 05 10	2.00
<b>COLL 01 06</b>	40	85	60	85	G1"1/4	420	160	G1/2"	13 03 11	13 06 10	2.50
<b>COLL 01 07</b>	40	85	60	85	G1"1/2	420	160	G1/2"	13 03 11	13 07 10	2.60

换算: N (牛顿) = Kg x 9.81 (重力); 1英寸 = 25.4mm; 1磅 = 453.6克 = 0.4536千克 GAS - NPT螺纹适配接头可见页码 1.130

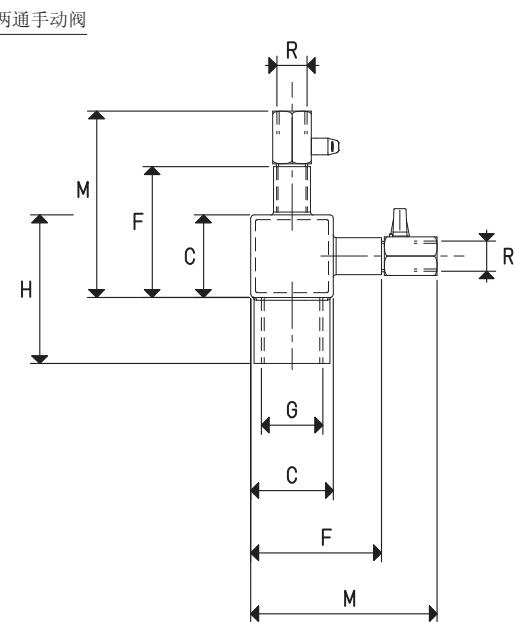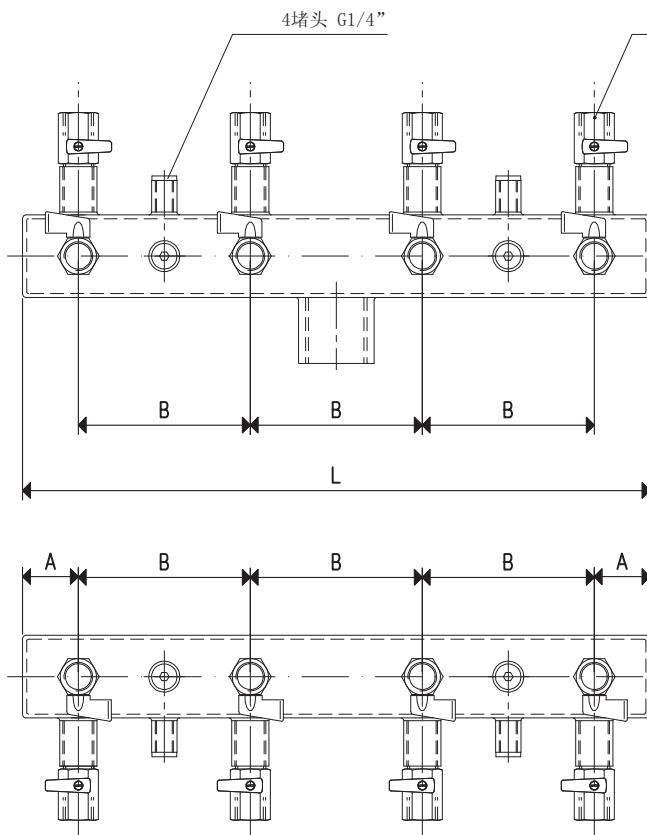

型号	A	B	C	F	G Ø	H	L	M	R Ø	手动阀 型号	重量 Kg
COLL 02 03	37.5	125	40	65	G1/2"	74	450	97	G1/4"	13 01 11	2.5
COLL 02 05	37.5	125	40	66	G1"	84	450	96	G3/8"	13 02 11	2.7
COLL 02 07	37.5	125	60	94	G1"1/2	108	450	127	G1/2"	13 03 11	2.9

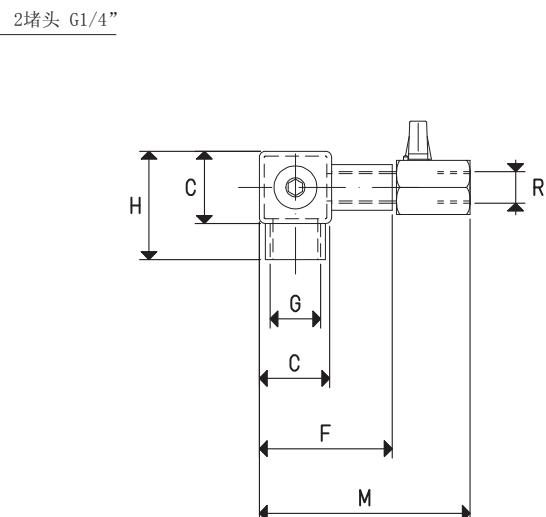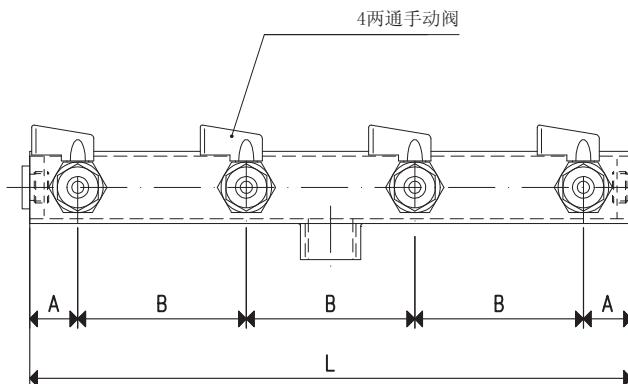

型号	A	B	C	F	G Ø	H	L	M	R Ø	手动阀 型号	重量 Kg
COLL 03 03	20	70	30	55	G1/2"	64	250	87	G1/4"	13 01 11	1.2
COLL 03 05	20	70	40	66	G1"	84	250	96	G3/8"	13 02 11	1.4
COLL 03 07	20	70	60	94	G1"1/2	108	250	127	G1/2"	13 03 11	1.5

换算: N (牛顿) = Kg x 9.81 (重力); 1英寸 = 25.4mm; 1磅=453.6克 = 0.4536千克 GAS - NPT螺纹适配接头可见页码 1.130