



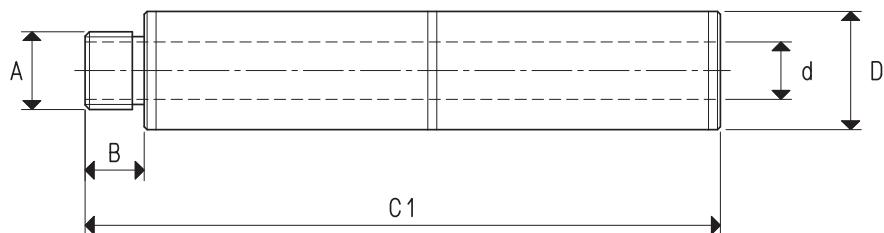

消音器

在特制的阳极氧化铝外壳中内置天然消音纤维，就是我们开发的这款全新系列消音器，能够显著降低真空发生器排气时噪音。

具有不同长度的两个版本：
长度越长，消音效果就越好。
降噪：-13至-20 dB (A)；
工作温度：-20至+100 ° C。

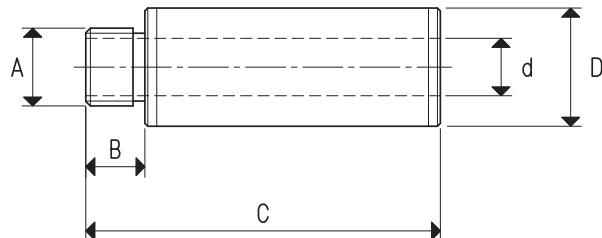

型号	A Ø	B	C	C1	D Ø	d Ø	重量 g
SSX 1/8"	G1/8"	10	58	--	17	7	14
SSX 1/4"	G1/4"	10	60	--	20	10	20
SSX 3/8" R	G3/8"	7	57	--	20	10	17
SSX 3/8"	G3/8"	12	84	--	29	16	52
SSX 1/2"	G1/2"	14	106	--	35	16	96
SSX 3/4" R	G3/4"	14	106	--	35	16	100
SSX 3/4"	G3/4"	14	126	--	50	21	174
SSX 1"	G1"	14	146	--	55	28	240
SSX 1" 1/2	G1" 1/2	30	210	--	80	38	302
SSX 2"	G2"	30	250	--	90	48	372
2SSX 1/8"	G1/8"	10	--	104	17	7	28
2SSX 1/4"	G1/4"	10	--	108	20	10	40
2SSX 3/8"	G3/8"	12	--	154	29	16	104
2SSX 1/2"	G1/2"	14	--	196	35	16	192
2SSX 3/4"	G3/4"	14	--	236	50	21	348
2SSX 1"	G1"	14	--	276	55	28	480
2SSX 1" 1/2	G1" 1/2	30	--	390	80	38	604
2SSX 2"	G2"	30	--	470	90	48	744

换算: N (牛顿) = Kg x 9.81 (重力) ; 1英寸 = 25.4mm ; 1磅=453.6克 = 0.4536千克 GAS - NPT螺纹适配接头可见页码 1.130