




带轴向真空连接的可定位挠性接头

阳极氧化铝制成的可定位挠性接头允许安装在其上的吸盘做360° 度旋转，最大倾斜度35°，以便正确适应抓取物体的表面，同时确保通过挠性接头的真空度和完美的密封性。



3D图可到网站vuototecnica.net上查阅

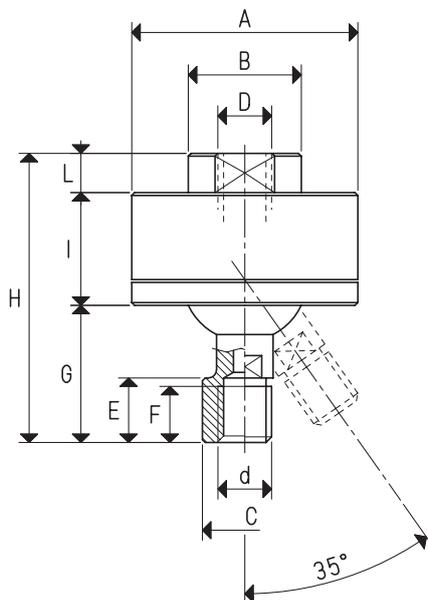

带轴向真空连接的可定位挠性接头

型号	A Ø	B Ø	C Ø	D Ø	d Ø	E	F	G	H	I	L	材质	允许的 最大负载 Kg	重量 g
GSV 1/8"	40	20	--	G1/8"	G1/8"	11.5	10	24.5	51.5	20	7	铝	18.24	77.6
GSV 1/4"	45	25	--	G1/4"	G1/4"	14.5	12	28.5	60.5	25	7	铝	23.54	126.7
GSV 3/8"	50	30	--	G3/8"	G3/8"	14.0	12	34.5	69.5	25	10	铝	33.91	171.2
GSVF 1/8"	40	20	15	G1/8"	G1/8"	11.5	10	24.5	51.5	20	7	铝	18.24	80.4
GSVF 1/4"	45	25	20	G1/4"	G1/4"	14.5	12	28.5	60.5	25	7	铝	23.54	129.2
GSVF 3/8"	50	30	21	G3/8"	G3/8"	17.0	12	34.5	69.5	25	10	铝	33.91	167.6

换算: N (牛顿) = Kg x 9.81 (重力); 1英寸 = 25.4mm; 1磅=453.6克 = 0.4536千克 GAS - NPT螺纹适配接头可见页码 1.134