






## 带校准孔的沉头螺钉

这些带有校准孔的沉头螺钉用于减小吸盘的吸气部分，从而在吸盘未能夹紧时减少真空损失。它们由黄铜制成，可以插入到为此用途设计的所有吸盘支座上。

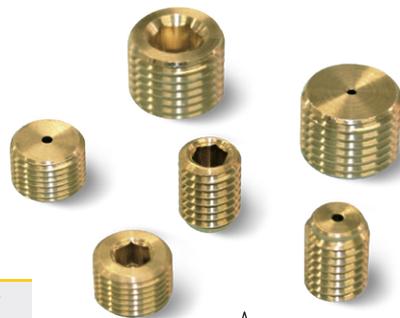

型号	A ∅	D ∅	F	H	平头螺钉 材质	重量 g
00 08 122	M8	0.9	5	11	黄铜	2.5
00 08 121	M8	1.2	5	11	黄铜	2.4
00 08 120	M8	1.5	5	11	黄铜	2.3

型号	A ∅	D ∅	F	H	平头螺钉 材质	重量 g
00 08 164	G1/8"	1.2	5	7	黄铜	3.0
00 08 165	G1/8"	1.5	5	7	黄铜	3.0
00 08 176	G1/4"	1.2	5	10	黄铜	4.0
00 08 334	G1/8"	3.0	4	7	黄铜	4.0

## 变径接头


这些标准附件为用户提供了不同的吸盘组装选项。

这些接头连接在吸盘标准支座上，由镀锌钢或黄铜制成，其螺纹可从GAS螺纹到公制螺纹或反之，从外螺纹到内螺纹或反之，当然还可增减其螺纹直径的大小。




### MP变径接头

型号	D ∅	d ∅	H	接头 材质	重量 g
00 08 130	G1/4"	M10	14	钢	4.0
00 08 131	G3/8"	M10	14	钢	12.0
00 08 230	G3/8"	G1/4"	14	钢	6.0
00 08 254	1/4" NPT	M10	14	钢	3.9
00 08 255	3/8" NPT	M10	14	钢	11.9
00 08 258	3/8" NPT	G1/4"	14	钢	5.9



### MM和MF变径接头

型号	D ∅	d ∅	E	F	G	H	变径接头 材质	重量 g
00 08 129	M12	G1/4"	15	14	11	40	黄铜	58.0
00 08 296	M12	G3/8"	18	--	10	28	黄铜	34.0
00 08 297	G1/4"	M12	16	--	11	27	黄铜	40.0

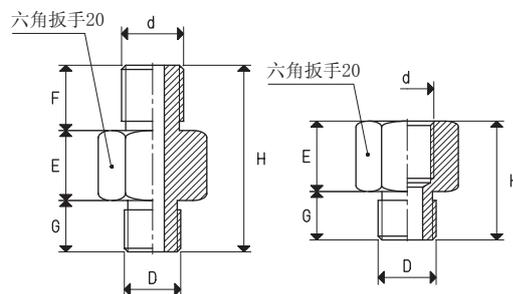


编号 00 08 129

编号 00 08 296

编号 00 08 297

### 用于GS铰接式联轴节的FF变径接头

型号	D ∅	E	F	G ∅	H	变径接头 材质	重量 g
00 08 54	M10	13	13.5	M5	36	黄铜	72
00 08 251	M8	16	15.0	G1/8"	48	黄铜	102
00 08 252	M12	16	15.0	G1/8"	48	黄铜	90






# 吸盘变径接头




MP变径接头

型号	D Ø	d Ø	F	H	承插焊	重量 g
00 08 215	G3/8"	G1/4"	8	14	6	11.5




MP变径接头

型号	D Ø	d Ø	F	H	承插焊	重量 g
00 08 216	G3/8"	G1/4"	8	11.5	6	6.0




MM变径接头

型号	D Ø	d Ø	E	F	承插焊	重量 g
00 08 217	G1/4"	G1/4"	15	10	6	16.7
00 08 218	G1/4"	M10 x 1.5	15	12	6	10.2
00 08 219	G1/4"	M14 x 1.5	15	12	6	16.0
00 08 220	G3/8"	G1/4"	14	10	6	18.4
00 08 221	G3/8"	M10 x 1.5	14	12	6	16.3
00 08 222	G3/8"	M14 x 1.5	14	12	6	22.5



MM变径接头

型号	D Ø	d Ø	E	F	承插焊	重量 g
00 08 223	G1/4"	G1/4"	11.5	10	6	13.9
00 08 224	G1/4"	M10 x 1.5	13.0	12	6	10.1
00 08 225	G1/4"	M14 x 1.5	13.0	12	6	15.8
00 08 226	G3/8"	G1/4"	10.5	11	6	16.6
00 08 227	G3/8"	M10 x 1.5	10.5	13	6	14.2
00 08 228	G3/8"	M14 x 1.5	10.5	13	6	20.2



换算: N (牛顿) = Kg x 9.81 (重力); 1英寸 = 25.4mm; 1磅=453.6克 = 0.4536千克