




SPECIAL VACUUM CUP HOLDERS WITH MALE AND FEMALE THREADED CONNECTORS

3D drawings are available on vuototecnica.net

Special vacuum cup holders with male threaded connectors

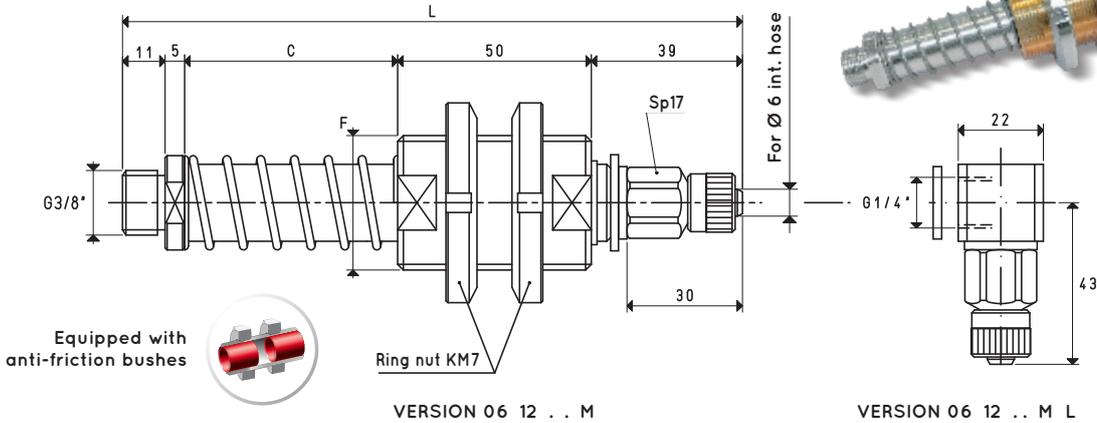


VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE Ø 6 X 8

Item	*C	Actual spring stroke mm	Spring thrust force N	F Ø	L	Weight Kg
06 12 55 M	55	37	70.63	M35 x 1.5	160	0.63
06 12 110 M	110	84	35.31	M35 x 1.5	215	0.77

Note: The vacuum cup holder's lifting force depends directly on the vacuum cup model applied to it.
To order vacuum cup holders with L fittings, add the letter L to the code.

Special vacuum cup holders with female threaded connectors

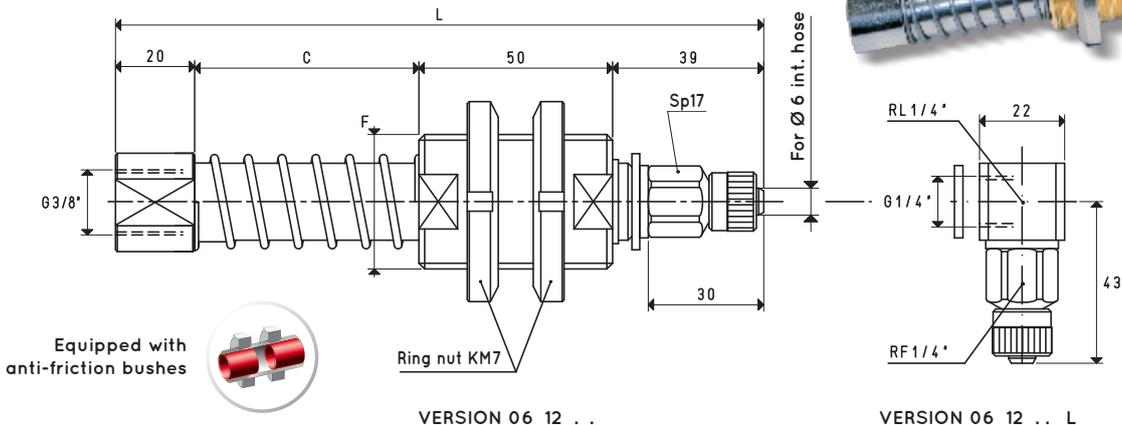


VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE Ø 6 X 8

Item	*C	Actual spring stroke mm	Spring thrust force N	F Ø	L	Weight Kg
06 12 55	55	37	70.63	M35 x 1.5	164	0.62
06 12 110	110	84	35.31	M35 x 1.5	219	0.75

Note: The vacuum cup holder's lifting force depends directly on the vacuum cup model applied to it.
To order vacuum cup holders with L fittings, add the letter L to the code.

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity) inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$


SPECIAL VACUUM CUP HOLDERS WITH MALE THREADED CONNECTORS

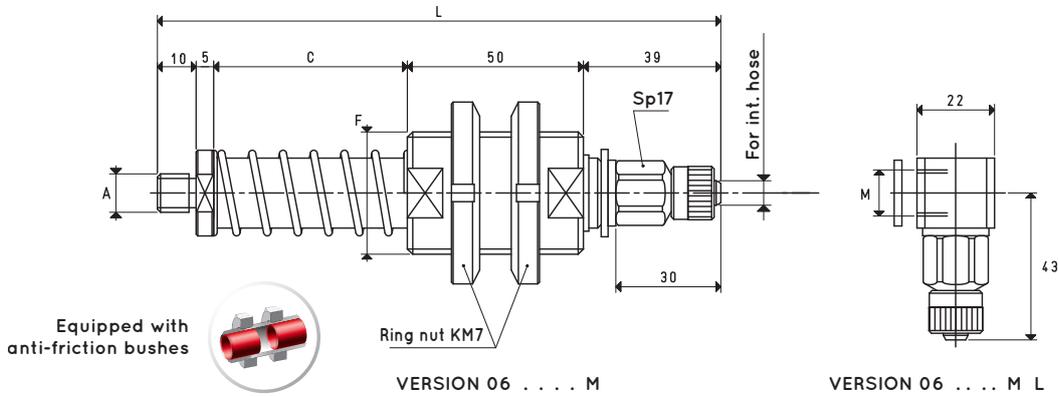

VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE Ø 6 X 8

Item	*C	Actual spring stroke mm	Spring thrust force N	A	F Ø	L	M	Int. hose Ø	Weight Kg
06 11 55 M	55	37	70.63	M12	M35 x 1.5	159	G1/4"	6	0.63
06 11 110 M	110	84	35.31	M12	M35 x 1.5	214	G1/4"	6	0.77
06 13 55 M	55	37	70.63	G1/2"	M35 x 1.5	159	G3/8"	9	0.63
06 13 110 M	110	84	35.31	G1/2"	M35 x 1.5	214	G3/8"	9	0.77

Note: The vacuum cup holder's lifting force depends directly on the vacuum cup model applied to it.
To order vacuum cup holders with L fittings, add the letter L to the code.

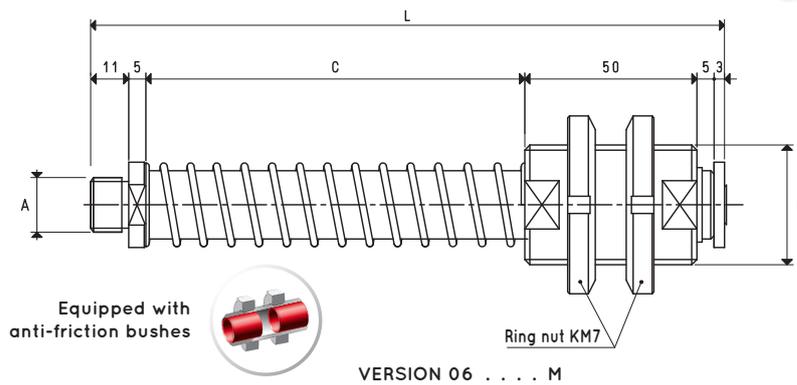

VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE Ø 6 X 8

Item	*C	Actual spring stroke mm	Spring thrust force N	A	F Ø	L	Weight Kg
06 14 55 M	55	37	70.63	M16	M35 x 1.5	129	0.52
06 14 110 M	110	84	35.31	M16	M35 x 1.5	184	0.65
06 15 55 M	55	37	70.63	M12	M35 x 1.5	129	0.52
06 15 110 M	110	84	35.31	M12	M35 x 1.5	184	0.65

Note: The vacuum cup holder's lifting force depends directly on the vacuum cup model applied to it.
The vacuum cup holder is not equipped with an axial vacuum passage.

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity) inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$