


SPECIAL VACUUM CUP HOLDERS FIX WITH MALE AND FEMALE THREADED CONNECTORS

Fix vacuum cup holders have been designed to adjust the height of the vacuum cups with support thanks to the threading along the entire length of the threaded bush. The ends are threaded for mounting the vacuum cup with support and the connector.

They are composed of:

- A threaded bush equipped with two ring nuts, for mounting the vacuum up holder on the automation;
- A quick coupling for connection with the suction hose.

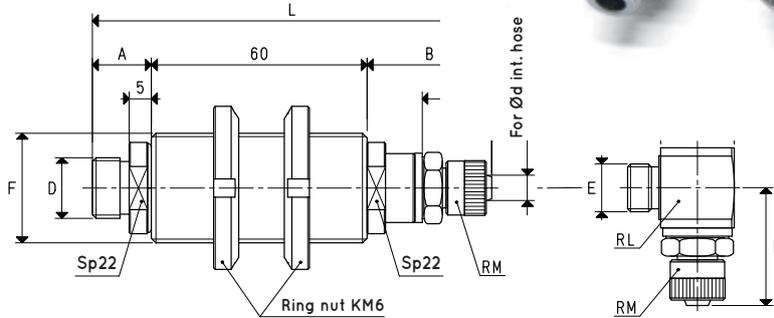


VERSION 06 70 ..

VERSION 06 70 .. L

VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE

Item	A	B	D Ø	d Ø	E Ø	F Ø	L	M	N	O	RL	RM	Weight g
06 70 90	15	34	G1/4"	6	G1/4"	M30 x 1.5	109	21.0	32.0	18.5	1/4"	1/4"	430
06 70 91	15	34	G3/8"	6	G1/4"	M30 x 1.5	109	21.0	32.0	18.5	1/4"	1/4"	430
06 70 92	15	40	G3/8"	9	G3/8"	M30 x 1.5	115	21.5	35.5	22.0	3/8"	3/8"	430
06 70 93	15	40	G1/2"	9	G3/8"	M30 x 1.5	115	21.5	35.5	22.0	3/8"	3/8"	435
06 70 94	15	34	M12	6	G1/4"	M30 x 1.5	109	21.0	32.0	18.5	1/4"	1/4"	430
06 70 95	15	40	M12	9	G3/8"	M30 x 1.5	115	21.5	35.5	22.0	3/8"	3/8"	430
06 70 96	15	40	M16	9	G3/8"	M30 x 1.5	115	21.5	35.5	22.0	3/8"	3/8"	435

Note: To order vacuum cup holders with L fittings, add the letter L to the code.

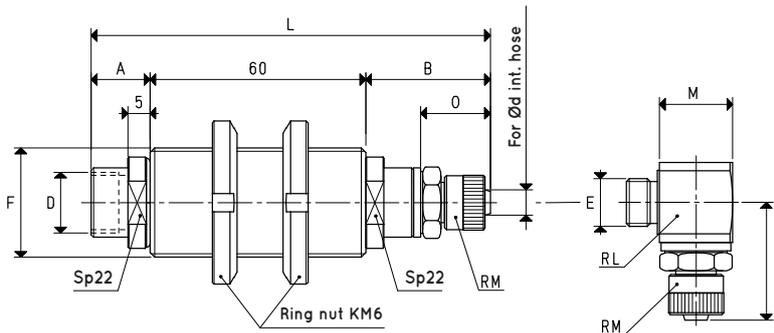

VERSION 06 70 ..

VERSION 06 70 .. L

VACUUM CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE

Item	A	B	D Ø	d Ø	E Ø	F Ø	L	M	N	O	RL	RM	Weight g
06 70 80	13	34	G1/4"	6	G1/4"	M30 x 1.5	107	21.0	32.0	18.5	1/4"	1/4"	435
06 70 81	15	40	G3/8"	9	G3/8"	M30 x 1.5	115	21.5	35.5	22.0	3/8"	3/8"	435
06 70 82	15	34	G3/8"	6	G1/4"	M30 x 1.5	107	21.0	32.0	18.5	1/4"	1/4"	435

Note: To order vacuum cup holders with L fittings, add the letter L to the code.

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)

inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$