




HORIZONTAL PUMP SETS DO 25V ...

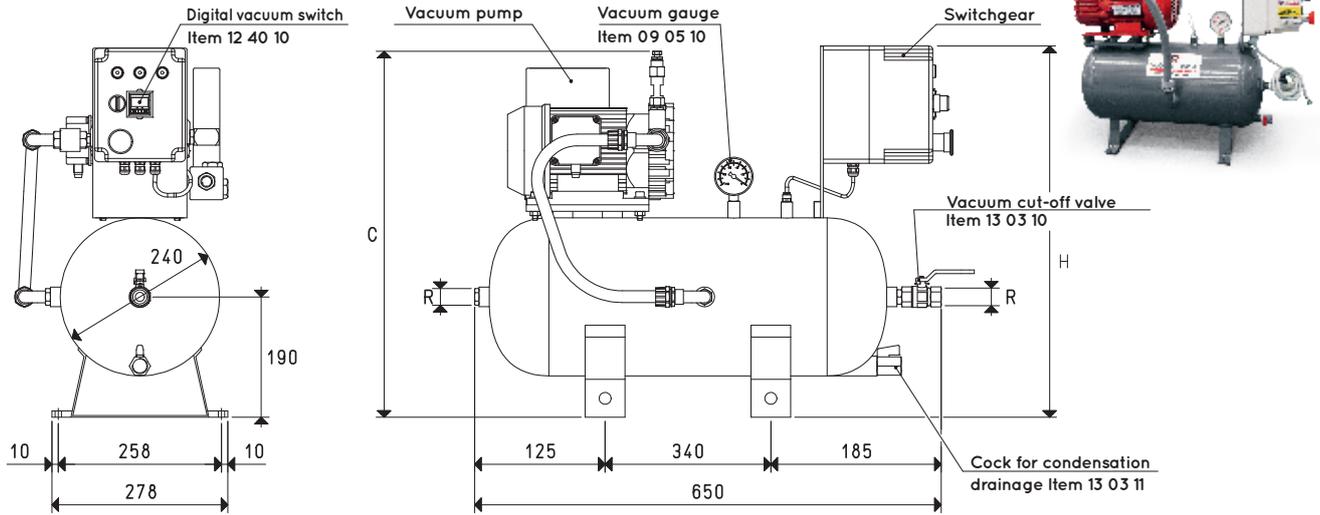


Item	Tank Litres	Pump Mod.	Motor performance Volt	Switchgear item	C	H	R Ø	Weight Kg	Filter Accessories item
DO 25V VTL 5	25	VTL 5	3 ~ 230/400-50Hz	DO 06 97V	540	570	G1/2"	33.5	FB 20 / FC 20
DO 25V VTL 5 M	25	VTL 5 M	1 ~ 230/50Hz	DO 06 98V	540	570	G1/2"	34.0	FB 20 / FC 20
DO 25V VTL 10	25	VTL 10	3 ~ 230/400-50Hz	DO 06 97V	540	570	G1/2"	39.5	FB 20 / FC 20
DO 25V VTL 10 M	25	VTL 10 M	1 ~ 230-50Hz	DO 06 98V	540	570	G1/2"	40.0	FB 20 / FC 20
DO 25V RVP 15	25	RVP 15	3 ~ 230/400-50Hz	DO 06 97V	525	570	G1/2"	35.0	FB 20 / FC 20
DO 25V RVP 15 M	25	RVP 15 M	1 ~ 230-50Hz	DO 06 98V	525	570	G1/2"	35.5	FB 20 / FC 20

Note: Add the letters SR to the item for a pump set supplied with sheets for movement (Example: DO 25V VTL 10 SR).

All RVP pumps .. are equipped as standard with an FC filter .. suitable for the size of their suction connection.

HORIZONTAL PUMP SETS DO 50V ...

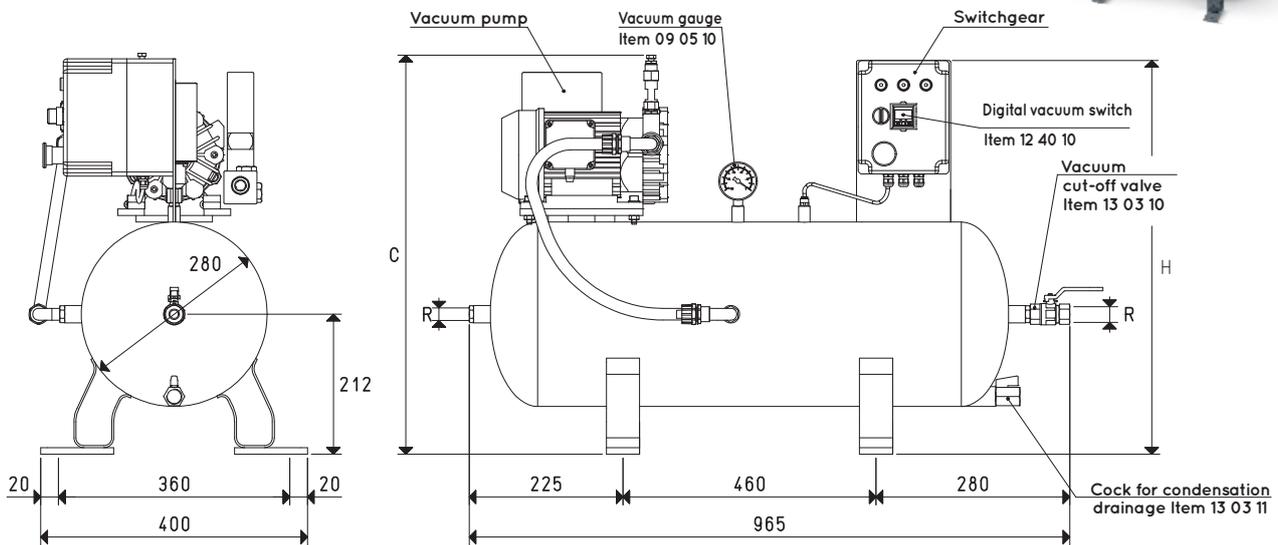

Item	Tank Litres	Pump Mod.	Motor performance Volt	Switchgear item	C	H	R Ø	Weight Kg	Filter Accessories item
DO 50V VTL 5	50	VTL 5	3 ~ 230/400-50Hz	DO 06 97V	620	612	G1/2"	39.3	FB 20 / FC 20
DO 50V VTL 5 M	50	VTL 5 M	1 ~ 230/50Hz	DO 06 98V	620	612	G1/2"	39.8	FB 20 / FC 20
DO 50V VTL 10	50	VTL 10	3 ~ 230/400-50Hz	DO 06 97V	620	612	G1/2"	45.3	FB 20 / FC 20
DO 50V VTL 10 M	50	VTL 10 M	1 ~ 230-50Hz	DO 06 98V	620	612	G1/2"	45.8	FB 20 / FC 20
DO 50V RVP 15	50	RVP 15	3 ~ 230/400-50Hz	DO 06 97V	680	612	G1/2"	40.8	FB 20 / FC 20
DO 50V RVP 15 M	50	RVP 15 M	1 ~ 230-50Hz	DO 06 98V	680	612	G1/2"	41.3	FB 20 / FC 20

Note: Add the letters SR to the item for a pump set supplied with sheets for movement (Example: DO 50V VTL 10 SR).

All RVP pumps .. are equipped as standard with an FC filter .. suitable for the size of their suction connection.

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)

inch = $\frac{mm}{25.4}$; pounds = $\frac{g}{453.6} = \frac{Kg}{0.4536}$

Adapters for GAS - NPT threading available on page 1.134