
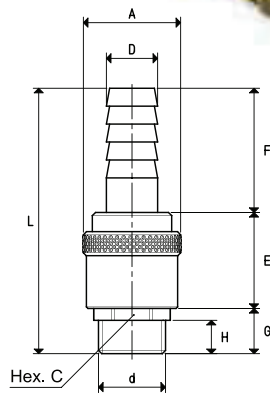
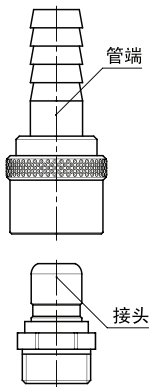


可转动的软管快插接头



软管快插接头由软管插入端口和外螺纹连接端口组成。

通过由弹簧顶住的球环和合成橡胶密封圈保证迅速有效的连接。

这种接头能让连接的两个零件在低速时自由旋转，也可以用手让两个零件快速连接和断开，该接头由黄铜制成，可供各种尺寸。

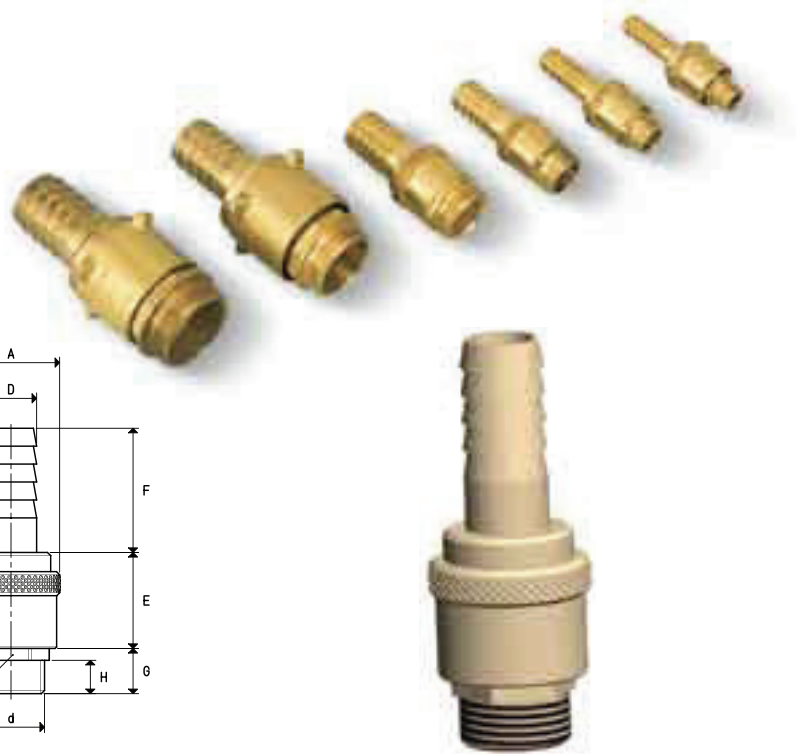

型号	d	A	C	D	E	F	G	H	L	材料	管端型号	管端重量	接头型号	接头重量
	∅	∅		∅								g		g
RR 3/8"	G3/8"	30	21	13	29.5	39.5	14	10.5	83.0	黄铜	00 RR 3/8 02	100	00 RR 3/8 01	38
RR 1/2"	G1/2"	30	21	16	30.5	38.5	14	10.5	83.0	黄铜	00 RR 1/2 02	104	00 RR 1/2 01	34
RR 3/4"	G3/4"	30	26	20	29.0	38.5	15	10.5	82.5	黄铜	00 RR 3/4 02	118	00 RR 3/4 01	50
RR 1"	G1"	38	34	25	30.0	40.0	17	12.0	87.0	黄铜	00 RR 1 02	166	00 RR 1 01	92
RR 1" 1/4	G1" 1/4	68	42	35	49.5	49.5	24	13.5	123.0	黄铜	00 RR 1 1/4 02	568	00 RR 1 1/4 01	210
RR 1" 1/2	G1" 1/2	68	48	40	49.0	54.0	25	17.0	128.0	黄铜	00 RR 1 1/2 02	710	00 RR 1 1/2 01	250

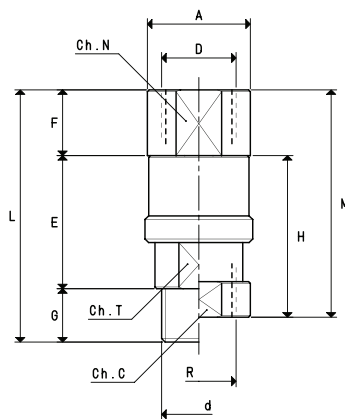

型号	A	C	D	d	E	F	G	H	L	M	N	R	T	材料	接头型号	接头重量	接头型号	接头重量
	∅		∅	∅									∅			g		g
RRF 3/8"	23.5	--	G3/8"	G3/8"	36.5	20.0	15	--	71.5	--	22	--	22	黄铜	00 RRF 3/8 02	77	00 RRF 3/8 01	58
RRF 1/2"	29.0	--	G1/2"	G1/2"	37.5	18.5	15	--	71.0	--	26	--	22	黄铜	00 RRF 1/2 02	79	00 RRF 1/2 01	72
RRF 3/4"	37.0	--	G3/4"	G3/4"	41.0	20.0	15	--	76.0	--	34	--	28	黄铜	00 RRF 3/4 02	149	00 RRF 3/4 01	132
RRF 1"	48.0	--	G1"	G1"	56.5	19.5	16	--	92.0	--	43	--	43	黄铜	00 RRF 1 02	369	00 RRF 1 01	355
RRFF 3/8"	23.5	22	G3/8"	--	--	20.0	--	45	--	65	22	G3/8"	--	黄铜	00 RRFF 3/8 02	82	00 RRF 3/8 01	58
RRFF 1/2"	29.0	26	G1/2"	--	--	18.5	--	46	--	64.5	26	G1/2"	--	黄铜	00 RRFF 1/2 02	80	00 RRF 1/2 01	72
RRFF 3/4"	37.0	34	G3/4"	--	--	20.0	--	57	--	77	34	G3/4"	--	黄铜	00 RRFF 3/4 02	199	00 RRF 3/4 01	132
RRFF 1"	48.0	43	G1"	--	--	19.5	--	67	--	86.5	43	G1"	--	黄铜	00 RRFF 1 02	409	00 RRF 1 01	355